

CP860 CPE DATASHEET



CP860

LTE Indoor CPE

3GPP Release 12

CAT12

802.11a/b/g/n/ac

VoIP or VoLTE

The CP860 from SUNWAVE is a premium indoor LTE CPE, designed for 802.11a/b/g/n/ac dual band Wi-Fi access. The product provides optimized high throughput data and a wide area coverage network for residential, commercial and enterprise users, supporting multiple services. Customers enjoy reliable dual-band Wi-Fi AP functions, broadband access and hot-spot Wi-Fi connections with the CP860.

CP860 CPE DATASHEET

RF SPECIFICATIONS		
Support Bands*	Option 1	LTE: FDD 1/3/7/8/(17)/20/(28) TDD 38/(40)/41/42/43/48
	Option 2 (Prototype)	LTE: FDD 2/4/5/8/12/14/17/25/26/66 TDD 38/41/42/43/48
CA	Inter/ Intra 2CA/3CA/4CA	
MIMO	DL 2CA (4 x 4 MIMO 64 QAM) DL 4CA (2 x 2 MIMO 256 QAM) UL 2CA (2 x 2 MIMO 64 QAM)	
Output Power@25°C/ 77°F	23 ± 2dBm	
LTE Antenna	4 built-in antennas	
LTE Antenna Gain	700 MHz ~ 1 GHz	3 dBi
	1.5 GHz ~ 2.7 GHz	3 dBi
	3.4 GHz ~ 3.8 GHz	5 dBi
Wi-Fi	Wi-Fi frequency	2.4 GHz/ 5GHz
	Wi-Fi antenna	Built-in high-gain Wi-Fi antenna
	Wi-Fi output power	2.4 GHz: 19dBm @ 11Mbps 5 GHz: 16dBm @ 54Mbps
	Wi-Fi channel BW	20 MHz & 40 MHz & 80 MHz
	Wi-Fi antenna gain	2.4 GHz: 2 dBi 5G Hz: 3 dBi

*The frequency bands in () are not included in the conventional sample.


HARDWARE SPECIFICATIONS	
LTE Standard	3GPP Release 12, CAT 12
Flash	2 GB
RAM	2 GB
Ethernet LAN Port	2 Gb RJ45 LAN port 10/100/1000M auto-sensing, auto-MDI/ MDIX
Voice POTS Port	1 RJ11
LED	8 LED indicators (PWR, Wi-Fi, TEL, NET, RF Signal x 4)
SIM	1 USIM/ SIM (3FF)
Reset/Reboot Button	Tact switch (3)
Antenna	8 built-in antennas
Dimensions	204.5 mm x 169 mm x 60 mm 8.05 in x 6.65 in x 2.36 in
Weight	< 500 g 1.1 lbs

Copyright © 2021 SUNWAVE All rights reserved.

CP860 CPE DATASHEET

Power Consumption	< 12W
Power Supply	AC 100 ~ 240V DC 12V 2A

ENVIRONMENT SPECIFICATIONS		
Temperature	Operating	-10 °C ~ 55 °C 14 °F ~ 113 °F
	Storage	-40 °C ~ 85 °C -40 °F ~ 185 °F
Humidity	Operating	5 ~ 95%
	Storage	5 ~ 95%

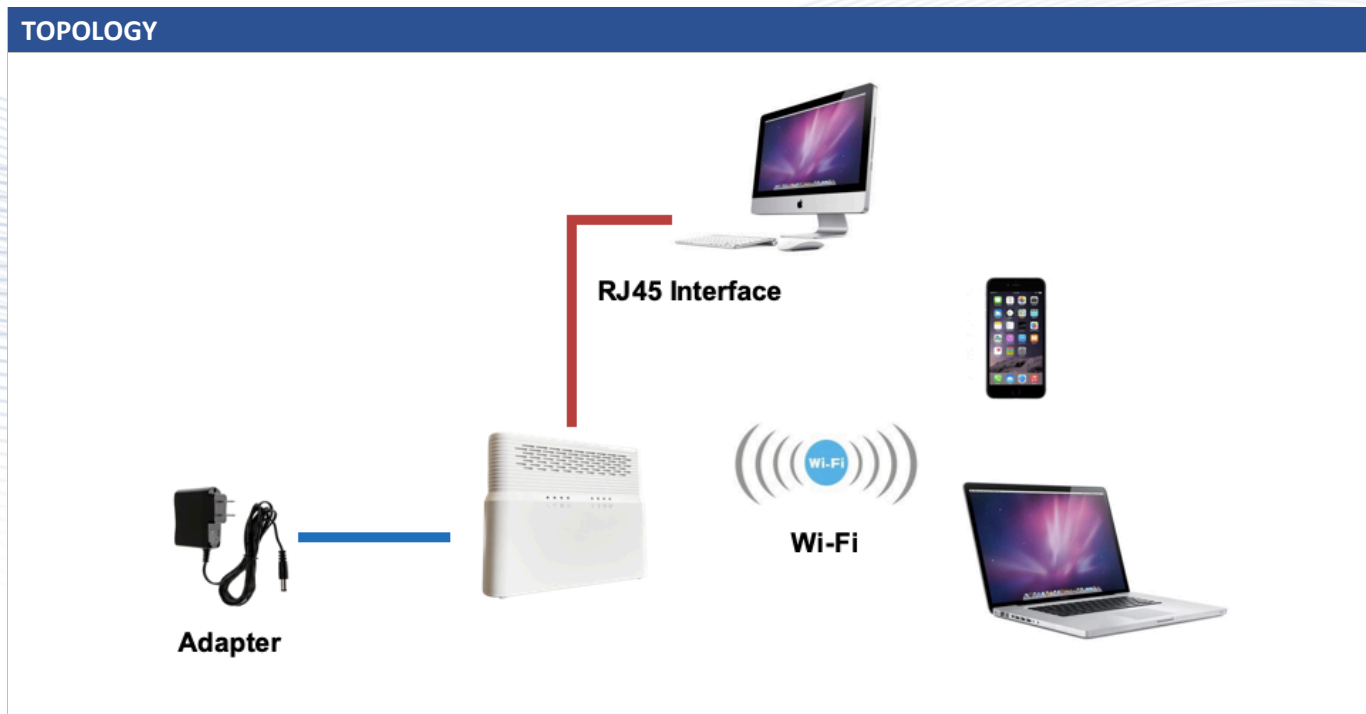

SOFTWARE SPECIFICATIONS	
Peak Throughput	TDD DL 560 Mbps UL 30 Mbps
	FDD DL 800 Mbps UL 150 Mbps
LAN	1000 Mbps
	MDI/ MDIX auto-sensing
	IEEE802.3/ 802.3u/ 802.3ab compatible
Device Management	TR069
	SNMP
	Integrity check
	Version rollback
	Software upgrade HTTP/FTP auto-upgrade
	Port mirror

Copyright © 2021 SUNWAVE All rights reserved.

CP860 CPE DATASHEET

	Syslog
	Diagnostics
Routing Mode	Route mode
	Bridge mode
	NAT mode
	IPv4/ IPv6 dual stack
VPN	IPsec
	L2TP over IPsec
	GRE over IPsec
	GRE L2/L3
	PPTP
	L2TP V2/V3
Security	Firewall
	MAC address filtering
	IP address filtering
	URL filtering
	UPnP
	Port forwarding
	DMZ
	HTTPS login from WAN
Redirect ICMP to the host	
VoIP/ VoLTE Functions	Call waiting
	Call hold/ resume
	Call forward on busy/ no answer
	Call transfer blind transfer/ attended transfer/ early attended transfer
	3-way conferencing
	Caller ID display/ blocking
	DTMF
FAX/ modem	
Wi-Fi Functions	Configuration through Web UI or TR069
	Encryption: Un-encrypted, WEP-OPEN, WEP- SHARED, WPA-PSK (TKIP), WPA-PSK (AES), WPA2-PSK (TKIP), WPA2-PSK (AES)
	Maximum users: 32
	Support SSID broadcasting
	Support multiple SSID
	Self-adaptive and manual channel selection
Support guest network	

CP860 CPE DATASHEET

APPENDIX-DELIVERS

Assembled Product	1 PCS
Ethernet Cable	1 M
Power Adapter	1 PCS

Contact Us Today

www.sunwave.com